



Public Address System

## Wall Mount Speaker System WL8063



WL8063W White



WL8063B Black

### OWNER'S MANUAL


Guangzhou DSPPA Audio Co., Ltd. is the editor in chief of the Technical Code for PA System Engineering; also it is a national high-tech enterprise. DSPPA PA speaker system is widely used in 2008 Beijing Olympics, Expo 2010 Shanghai China, airport, railway station, etc.

#### FEATURES:


- Input 70V/100V/4-16  $\Omega$  , sensitivity  $90 \pm 2\text{dB}$ , rated power 30W. Max. SPL  $104 \pm 2\text{dB}$ , Effective Freq. Range 80Hz - 20kHz;
- Weight 3.0 kg, equipped with hanging holes for mounting convenient;
- Made of high quality engineering plastic, long-term durability, never out of shape and fade;
- Long life, sounds clear and sonorousness.

#### FREQ. RESPONSE

(dB SPL, 1W, 1m)

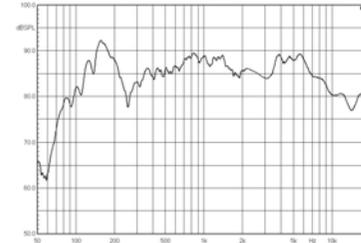


#### HANGING HOLE

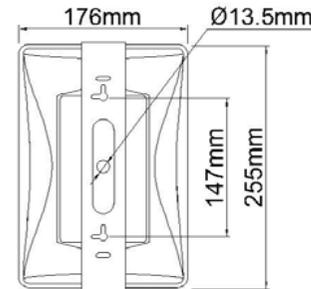


#### DISTORTION

(THD < 1.5% 1W, 1m, 200Hz-12kHz)

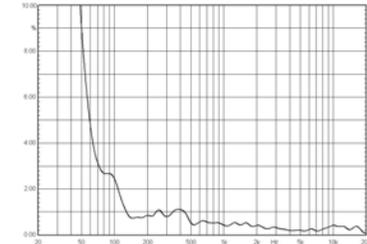

#### NAIL FOR MOUNTING

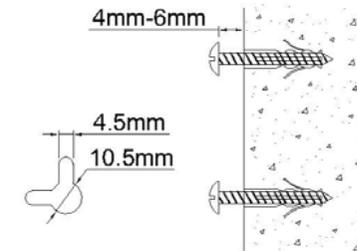

#### INSTALLATION

1. Fit two  $\text{Ø}4\text{mm}$  nails on wall where it is needed to install a speaker system.
2. Connect audio broadcasting wire to the speaker according to the table below.

Impedance	Input Voltage	
	70V	100V
160 $\Omega$	30W	※
300 $\Omega$	15 W	30W
600 $\Omega$	8W	15W
1K $\Omega$	5W	8W
2 K $\Omega$	2.5W	5W

3. Position the speaker, then adjust the direction of it and examine whether it is steady.

Guangzhou DSPPA Audio Co., Ltd.